





Pentra 1 400

From routine to specific testing

Now, pass your Analysis with flying Colours

- Up to 420 tests per hour with the ISE module
- 55 on-board parameters with back-up availability
- Innovative cassette format
- Integrated work station and validation station
- Touch screen interface
- Real-time follow-up of your workflow E



To meet the requirements for highly accurate photometric measurements, HORIBA Medical has chosen the holographic grating technology developed in collaboration with HORIBA Scientific (Jobin Yvon Technology).

- Spectral unit offering 15 different wavelengths (mono or bi-chromatic)
- Optimised reading by continuous sweep
- Highly sensitive measuring (validated holographic technology)
- Space-saving design with maximum efficacy provided by the tungsten lamp

The holographic grating technology reduces light diffraction and provides a high signal / noise ratio which significantly increases the quality of measurement to produce precise and stable test results.



A concentration of technology for high quality results

INTEGRATED ISE MODULE

Optional ISE module designed by HORIBA Ltd., Japan.

180 tests/hour

Simultaneous analysis of Sodium, Potassium and Chloride

Applications on Serum, Plasma and Urine

High quality analytical technology

Single-use reaction cuvette To perform the most sensitive tests and all latex assays with high stability results.

High performance mixer design For optimal homogenisation in minimum time without cross-contamination.

Optimum test sequence setting program with Incompatibility function


Integrated ISE module

High-precision Optical system

REAGEN

An extensive panel of liquid reagents

High quality analytical technology

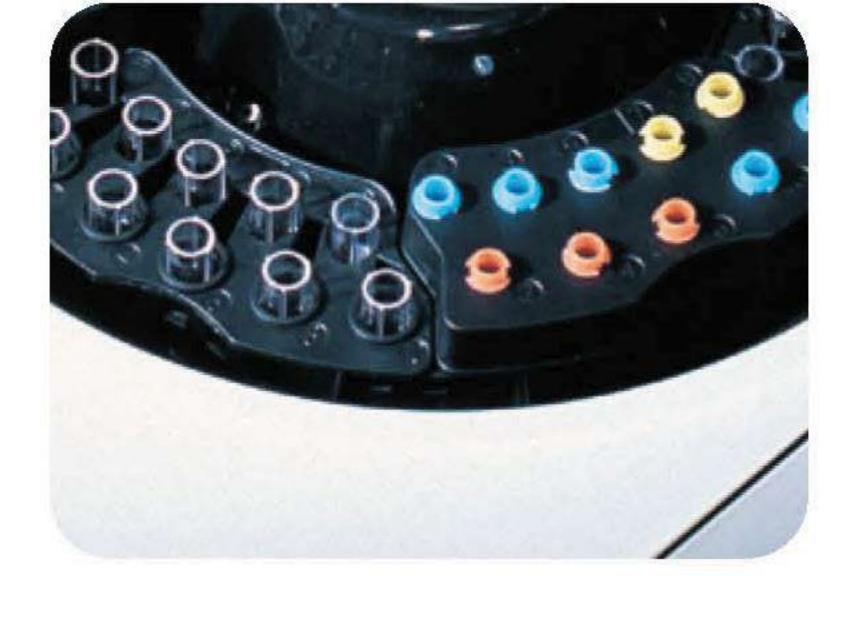

Sample management

- Positive identification
- Multiple sample checks using shock, level and fibrin detection
- Continuous loading
- STAT capability


Pentra \$... 400

- Automatic Pre / Post-dilution
- Automatic Re-run



Reagent management

- Barcoded cassettes
- Optimised test packaging
- Reagent test count down with automatic back-up
- Refrigerated zone with up to 44 positions
- Extensive on-board test menu
- User defined channels

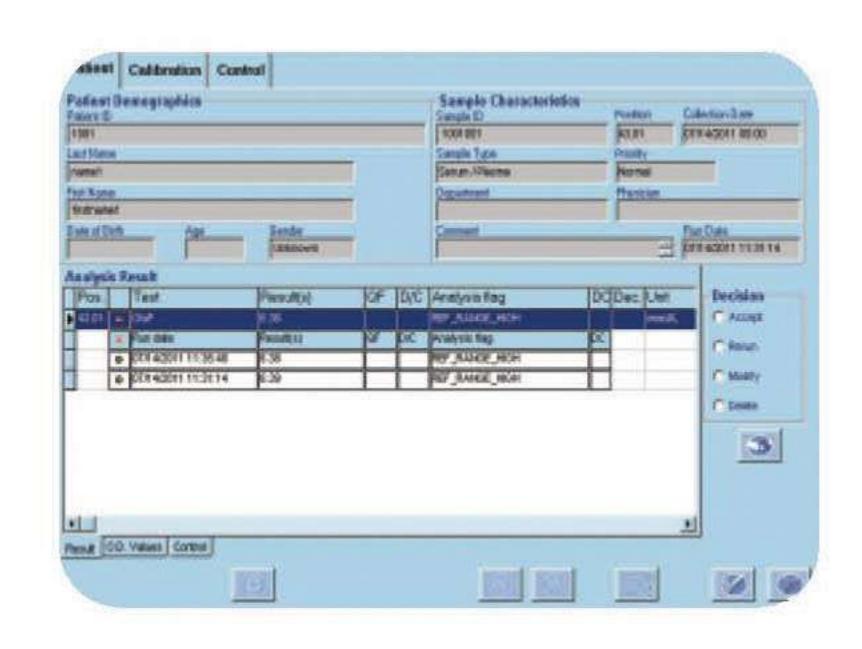

Secure data management

- Secured results validation
- Reliable traceability in compliance with Accreditation Standards



Patient management

- Work list generated by a manual entry or bi-directional connection
- Automatic validation based on user defined rules
- Intelligent delta checking
- Panic values monitoring
- Unlimited patients reports archiving

An extensive panel of liquid reagents

Cassette packaging

- Mono / Bi reagent cassettes
- Ready-to-use
- Extended range
- > 52 reagents
- > Enzymes / Substrates / Specific Proteins



Easy management of your lab processes

- Random position on board
- Automatic traceability: lot number, expiration date, ...
- Automatic back-up
- Just one calibrator and two controls for global routine analysis



Environment protection


Compact cassette packaging that respects the environment

- No more superfluous packaging
- Saves refrigerator space



Cost control

- Optimised number of tests per cassette
- Limited calibrations
- Re-run analysis according to laboratory defined rules
- Activity measurement thanks to the test counter option⁽¹⁾

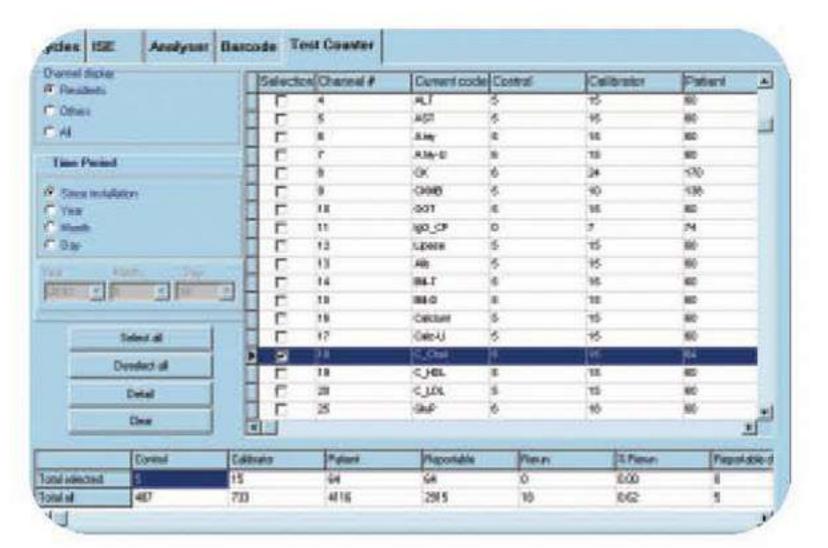

(1) Test counter

Pentra : 400 New Generation

The Pentra C400 is an evolution of the successful system, the P400. This evolution ensures the user a platform that is reliable and extremely user friendly, whilst ensuring quality results that is the requirement in such an environment.

Save valuable time

Automatic reagent management

- Intelligent monitoring of reagent supply: the "workbalance" function assesses the stock on board relative to the workload requirements⁽¹⁾
- Use limit date and Calibration validity checks

Real-time workflow follow-up

- Control all your operations from the main screen (system, reagent and sample status)
- Dynamic display of the test results and sampling exceptions with the test review function⁽²⁾
- Multiple alarm sounds available

Reduced maintenance procedures

- Automatic daily procedures
- Maintenance alerts
- Easy uploading of target values for calibrators and controls

Secure data management

Secured results validation


- Westgard multirule Quality Control procedure with up to 3 controls
- Automatic calibration factor check
- Selective flagging

Reliable traceability in compliance with Accreditation Standards


- Operator login history / Reagents, Calibration and Maintenance logs
- Full patient results traceability: multi-format option for archives review, end of day patient reports
- Full QC program: Up to 12-month control history, Levey-Jennings and Statistics⁽³⁾
- Easy export of archived data (USB key)



(1) Workbalance

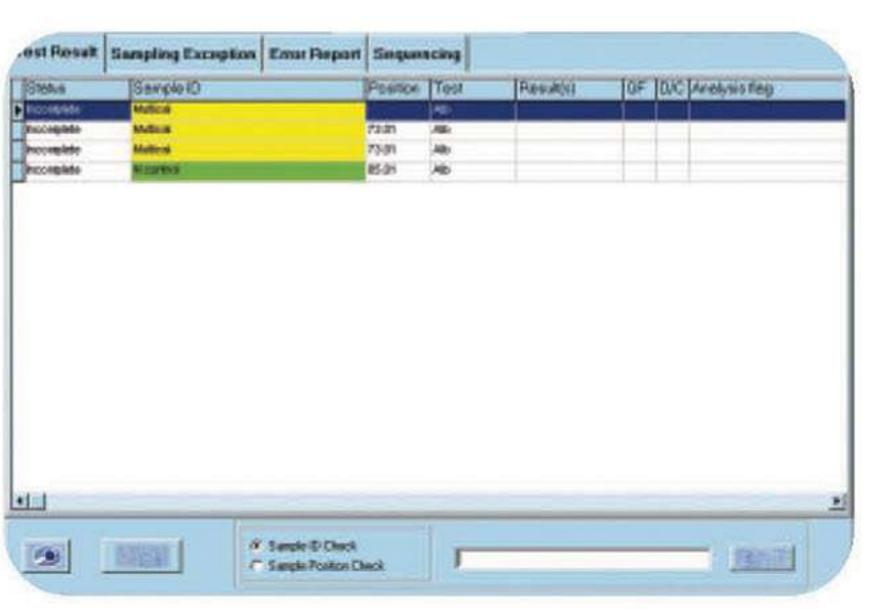

(2) Test review

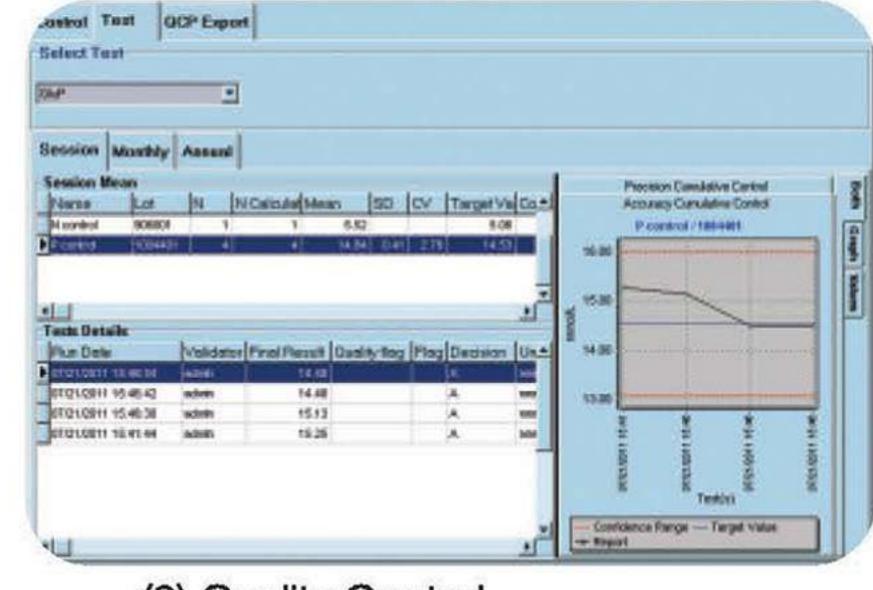

(3) Quality Control



Technical Specifications



General Description

Analysis Method Types:

- Spectrophotometry: Colorimetry and Turbidimetry,
- Potentiometry: Direct (Serum or Plasma) and Indirect (Urine)

Up to 55 parameters on board Optional ISE Module (Na+, K+, Cl-) Maximum Throughput: 420 tests/h CE Marked & FDA Approved

Sample Handling

Sample Capacity: 6 racks with 10 sample positions for primary tubes or cups

Positive Sample Identification: Integrated Barcode Reader

and Tube Presence Detector

Sample Needle: Level, Shock and Clot Detection Sample Collection Format: 2, 3, 4, 5, 7 and 10ml

(diameter: 16mm)

Sample Specimen: Serum, Plasma, Urine, CSF, Whole Blood,

Homogeneous Fluids
Sample Volume: 2 to 380 µL

Automatic Sample Dilution: from 1/2 to 1/22500 Automatic Post Concentration: from x2.0 to x10.0 ISE: 10 μ L (Indirect) or 65 μ L (Direct)

c 111 . /c . 1 11 . 111

Calibrator/Control Handling

Calibrator/Controls Positioning on Sample or Reagent Tray Automatic Standard Dilution Series:

Dilution Factors: Main Direct 1/2 - 1/150
 Dilution Factors: Main Indirect 1/2 - 1/1508

Reagent Handling

52 Reagent positions on board:

- 44 in a closed refrigerated area (2-10C),
- 8 at room temperature

Positive Reagent Identification: Integrated Barcode Reader

Reagent Needle: Level Detection and Preheating

Reagent Management with Cassettes

Automated Reagent On-board Stability Check plus Test

Countdown

Reagent Volume: from 2 to 600 µL

Reaction System

Reaction Volume: 150 to 600 µL
Reaction Temperature: Air bath at 37C
Photometer Reaction Cycle: 12 seconds
Homogenization with Teflon-coated Stirrer

Reaction Time: 1 to 100 cycles Disposable Acrylic Cuvettes Automatic Cuvette Changer

Cuvette Capacity: 36 segments (432 cuvettes)

7 Integrated Calculation Algorithms

Optical System

Tungsten-halogen Lamp Measurement Principle

- Bi-chromatism of light absorbance
- Choice of 15 wavelengths from 340 to 700 nm
- Wavelength selection with holographic grating technology

Sensor: Photo diode array Optical Linearity

2.5 A. at 340nm; 3.0 at other wavelengths



Computer and Software Specifications

Operating System: Windows XP
Data Processing:

- 12 inch Color LCD Touch Screen
- Database Capacity; 10,000 patients
- Processor: 850 MHz
- RC 232C: Patient results, QC to LIS with ASTM Protocol

Integrated Validation Station

Quality Control Management: Levey Jennings, Automatic QC Logs:

- Reagents, Quality Controls, Calibration
- Applications, Maintenance, Flags and Alarms

Interactive Help (HTML) Format

Back-up Cassettes

Physical Specifications

System Size: 101x71x63 cm System Weight: 120 kg

External Cooling Unit Size: 29x42x40 cm (W/L/H)

External Cooling Unit Weight: 35 kg

Laser Printer

Sound Level <66 dBa

Operating Temperature: from 15 to 32C Operating Humidity: from 20 to 85%

Total Power Requirements (with Printer): 1000 VA Water: De-ionized/Distilled Water 10L Tank Water Specifications: Resistivity > 5 MegOhms

Conductivity $< 0.2 \mu S/cm$

Certification

IEC 61010-1 EN 61326 EN 61000-3-2 EN 61000-3-3 CSA-C22.2 No.1010-1 UL 61010A-1



HORIBA India Private Limited

246, Okhla Industrial Estate Phase III, New Delhi - 110020, India, Tel: +91 (11) 4646 5000 / 4669 5001 Fax :+91 (11) 4646 5020 / 4669 5010 http://www.horiba.com, Toll Free No. 1800-103-4470, E-mail: pentramicros.hin@horiba.com

FRANCE +33 (0)4 67 14 15 15 - BENELUX +32 (0)3 281 49 08 - ITALY +39 / 06 51 59 22 1 - SPAIN +34 / 91-353 30 10 - PORTUGAL +351 / 2 14 72 17 70

UK +44 (0) 1604 542650 - POLAND +48 / 22 6732022 - USA +1 / 949 453 0500 - BRAZIL +55 / 11 5545 1500 - THAILAND +66 / 2 861 59 95

CHINA +86 / 21 3222 1818 - INDIA +91 / 11 4646 5000 - GERMANY AXON LAB AG +49 / 7153 92260 - DISTRIBUTORS NETWORK +33 (0)4 67 14 15 16

HORIBA Medical online : http://www.horiba.com/medical



